

LC-Duplex-Kupplung / Metall LC-Duplex-Adaptor / Metal

Merkmale


- Metallausführung
- Flanschbefestigung
- Hohe mechanische Belastbarkeit
- SC Simplex Footprint
- 2 Schrauben M2x6 beiliegend

Features

- Metal work
- Flange mount
- Extreme mechanical stability
- SC Simplex Footprint
- 2 bolts M2x6 attached



Abmessungen Dimensions

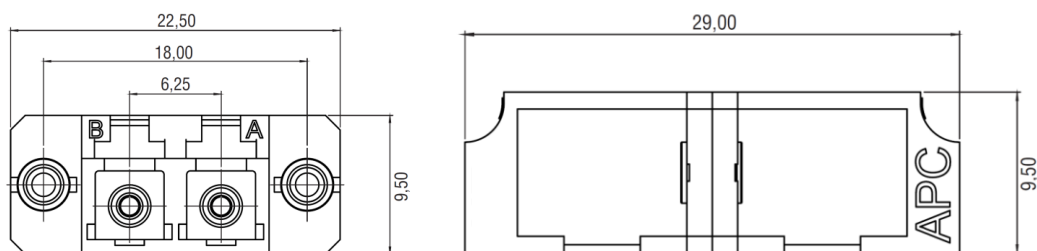

Technische Daten Technical Data

Artikel-Nr. Part number	LDK1-9426-K12M	LDK2-9426-K12S	LDK8-9426-K12A
Bezeichnung Description	Multimode	Singlemode	APC
Typische Dämpfung Typical loss	≤ 0,15 dB	≤ 0,1 dB	≤ 0,1 dB
Gehäusematerial Housing material	Metall metal	Metall metal	Metall metal
Material Hülse Material sleeve	ZrO ₂ , geschlitzt ZrO ₂ , split		
Steckzyklen Mating cycles	1.000		
Betriebstemperatur Operating temperature	-40 °C / +85 °C		
Lagertemperatur Storage temperature	-40 °C / +90 °C		
Befestigungsart Fixing	2-Loch-Flansch 2-hole-flange		