

ST-Simplex-Kupplung ST-Simplex-Adaptor

Merkmale


- Zentralbefestigung M9x1
- Unterlegscheibe und Mutter beiliegend

Features

- Central fixing M9x1
- Washer and nut attached



Abmessungen Dimensions

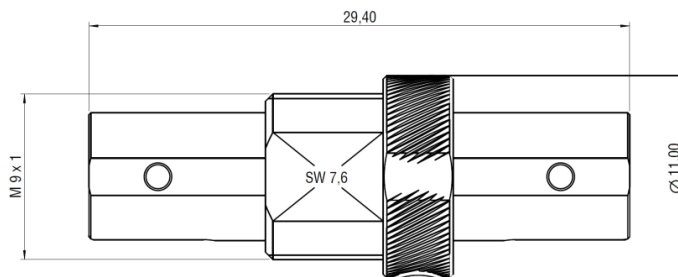

Technische Daten Technical Data

Artikel-Nr. Part number	ESK5-9010-M25M	ESK5-9010-C25M	ESK6-9010-C25S
Bezeichnung Description	Multimode	Multimode	Singlemode
Typische Dämpfung Typical loss	≤ 0,2 dB	≤ 0,15 dB	≤ 0,1 dB
Gehäusematerial Housing material	Metall metal	Metall metal	Metall metal
Material Hülse Material sleeve	Phosph.-Bronze, geschlitzt phosphor-bronze, split	ZrO ₂ , geschlitzt ZrO ₂ , split	ZrO ₂ , geschlitzt ZrO ₂ , split
Steckzyklen Mating cycles	500	2.000	2.000
Betriebstemperatur Operating temperature	-40 °C / +85 °C		
Lagertemperatur Storage temperature	-40 °C / +90 °C		
Befestigungsart Fixing	M9x1 Zentral M9x1 central		
Anmerkungen: Kupplung auch in der Hybridausführung SC-ST (siehe unter SC-Kupplungen) Notes: Also available as hybrid-version SC-ST (see SC-Adaptors)			